



STEEL BLASTING MACHINE


500VH

TECHNICAL DATA	
Working width	500mm
Blasting capacity	Up to 70m ² /h on steel SA 2,5
Blast wheel power	18,5kW
Drive system / Hoisting speed	Electric / 0,5 – 20 m/min
Weight	1625 kg
Output motor	3 x 400V / 60Hz standard (also available in 50Hz)
Electrical CEE plug	63A / Three phase – 5 pole
Dimensions L / W / H	1.000 mm / 1.550mm / 2.000mm
Abrasive consumption	0.5 – 1.0 kg/m ²
Application	Vertical steel

OPTIONS / ACCESSORIES	
Dustcollector	BDC-854
500VH hoisting system	Hoisting system
Abrasive S460 / SG12 / SG16	999-0460 / 999-0012 / 999-0016
Suction hose Ø150 (minimum 40m)	001112
Maintenance kit	On request
Personal safety features	On request



BDC-854

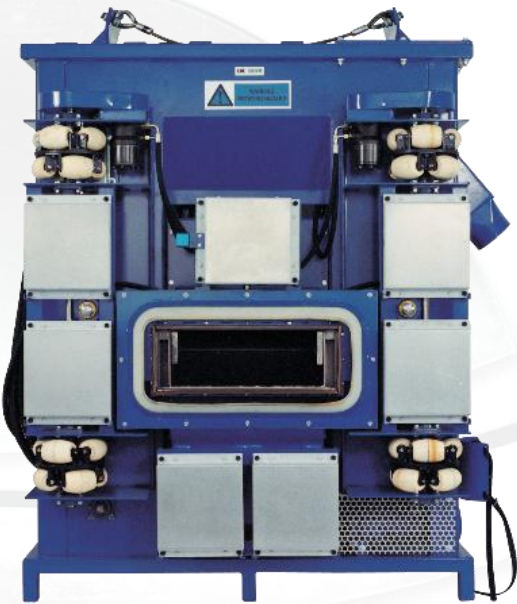

MAIN ASSETS

- Closed circuit which is dust free, when connected to an appropriate Blastrac dust collector.
- Hydraulic hoisting system.
- Increased productivity, reduced maintenance costs.
- The best vertical performer for thick-layers coating and chlorinated rubber removal.
- Fast and efficient removal of coatings, paint, rust and mill scale.
- Ergonomic design and user friendly remote control panel.
- Especially designed to be used on vertical steel surfaces like; oil / storage / water tank shells, ship hulls, oil platform blisters, offshore hulls and many more.

FOR MORE INFORMATION VISIT WWW.BLASTRAC.EU

Blastrac 06/2012 • This document is not contractual • Design and technical specifications may be subject to changes